

## side sealing intermittent motion machines

What design promises, it maintains. Continuous, side-sealing machine with intermittent motion sealing bar. Now available in an Economy version as well. Reliability is our first and foremost priority and it comes even before the certainty that you'll never grow tired of using it.


### >> general features

Continuous, side-sealing machine equipped with an intermittent, welding bar. High precision & quality thanks to the fine profile. This machine can handle any kind of film by simply using some additional optional sealing systems. FILM: Polyolefin, PE, Polypropylene, Barrier Films. The machine has a three belts sealing system which allows to achieve considerable film saving thanks to the reduced space between side seal and products. Film Saving and possibility to work with different kind of films, cross linked and not is a great advantage. Preferred Packing machines can be equipped with different types of infeed and outfeed conveyors: flighted conveyors, conveyors with pushers, intralox, etc; pushers, feeders stackers, shrink tunnels and many other accessories to create a complete line.


### >> specific features

Sol is equipped with a transversal sealing bar that moves vertically and descends when the product arrives in order to cut and seal the bag in the front and back sides with rapidity & accuracy. Flexibility it's the big advantage on the SOL machines. Thanks to continuous side sealing there are no limits in products' length. Products sizes up to 1000 mm width and height up to 40 cm. Speed calculated with A4 format: up to 3000-4500 pcs/h. Wrapping and shrinking solutions: standard wrapping and bagging shrink wrapping, bag with Euro hole or handle; systems that add an hole or handles to the bag in order to carry or hang the products easily, easy opening. "Modified atmosphere system"- MAP: to pack in protected atmosphere with Barrier Film & Polypropylene.

### >> details

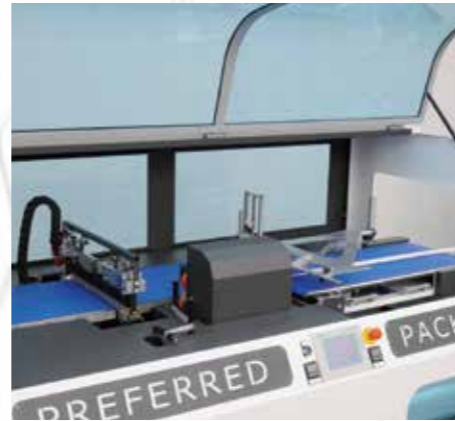

Side sealing machine: superior flexibility and significant film saving.

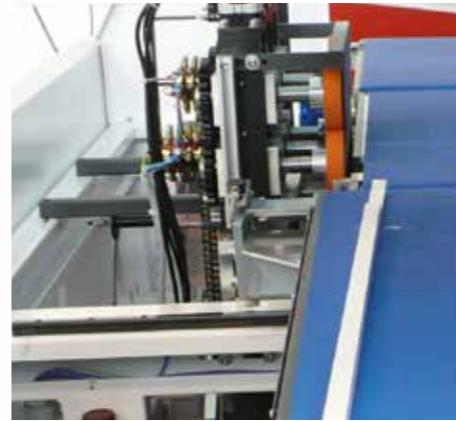

Reduced space between the side sealing and the product, to save 10 cm of side film.




Easy change of format: center sealing and triangle-inverting head motorized. Height up to 400 mm.




Film dispenser unit and film wind up unit both in front of the machine easy to be reached. Remarkable user-friendliness. Sliding door.



Space saving : machine can be positioned on the wall.

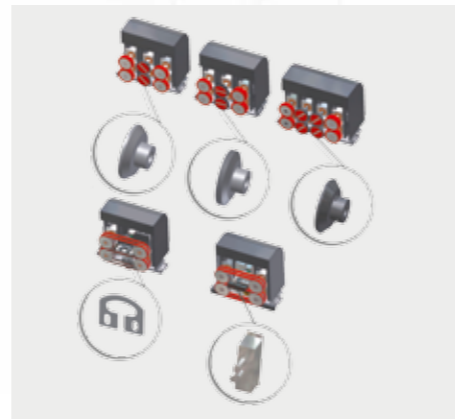

Flexibility: optional side sealing and transversal sealing systems for all kind of films.

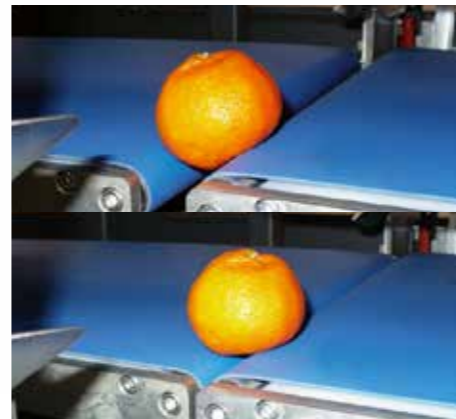

Kissing belt mounted as standard in all our machines to pack smaller and round /irregular shape products.




High quality components, ISO certified.

**PREFERRED PACKAGING ITALY**  
leader in the manufacturing packaging equipment

**DM  
PACK**

>> **SOL**


side sealing intermittent motion machines

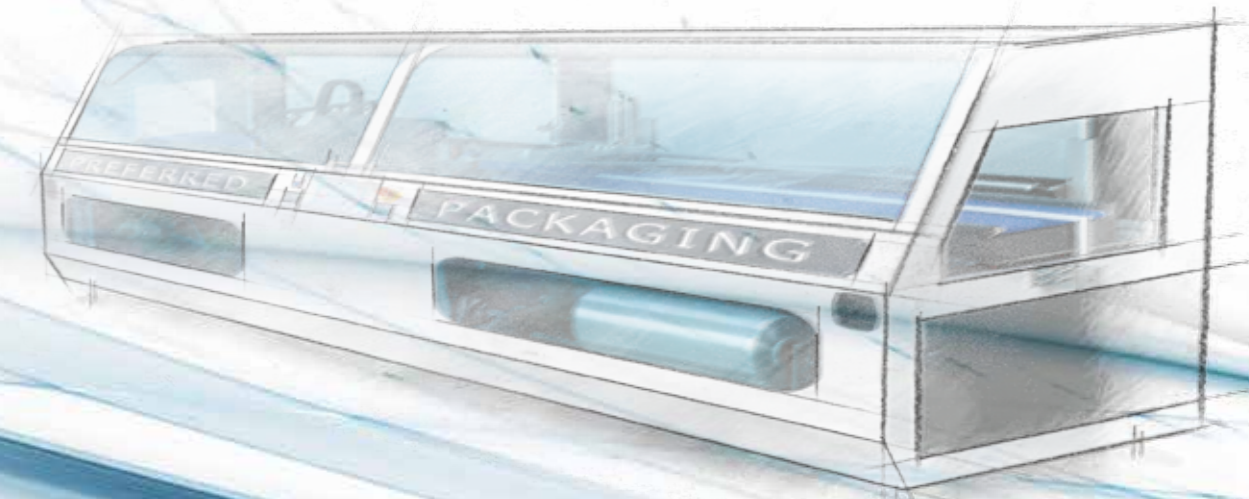

GB

# SOL

side sealing intermittent motion machines

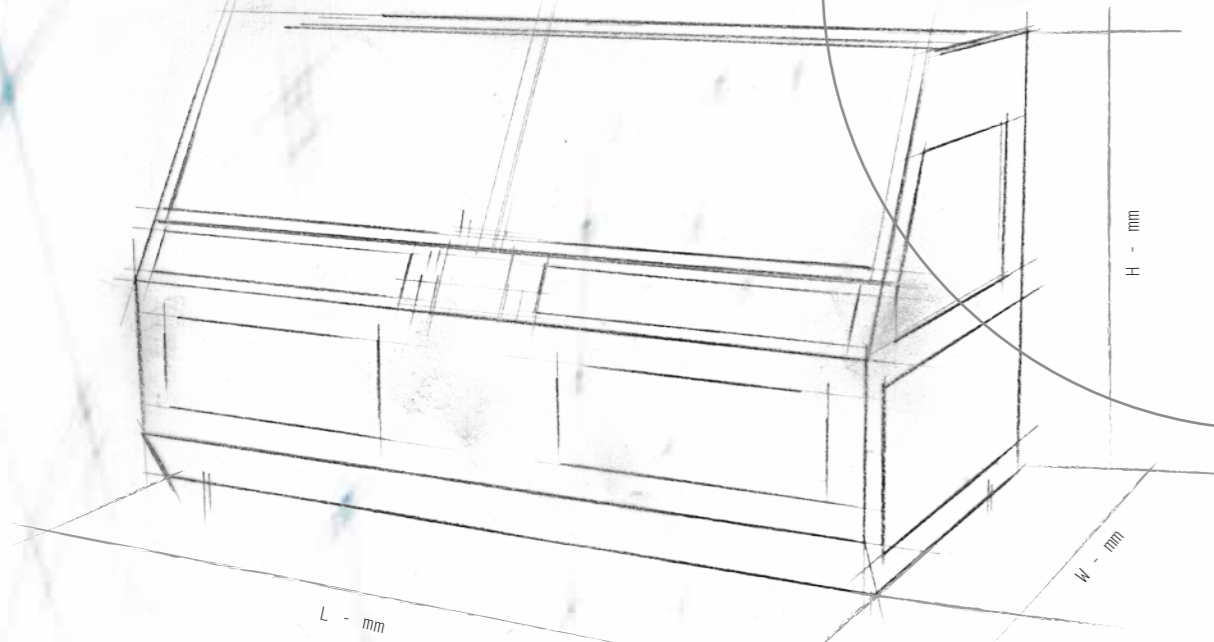

## >> technical features

MOD.	500	600	800	1100	500 eco
Sealing dimensions	500 mm	600 mm	800 mm	1200 mm	500 mm
Max product's width	420 mm	520 mm	720 mm	1020 mm	420 mm
Max product's length	unlimited	unlimited	unlimited	unlimited	unlimited
Max. product's height	200 mm optional up to 400	200 mm optional up to 400	200 mm optional up to 400	200 mm optional up to 400	200 mm
Film width	650 mm	750 mm	950 mm	1200 mm	650 mm
Film roll diameter	350 mm	350 mm	350 mm	350 mm	350 mm
Working height	900+/- 50	900+/- 50	900+/- 50	900+/- 50	900+/- 50
Machine size (LxWxH)	2300x1300x1500	2300x1400x1500	2600x2000x1650	2900x2500x1550	2300x1300x1500
Weight	800 Kg	900 Kg	1000 Kg	1100 Kg	900 Kg
Speed	75 p/min	75 p/min	65 p/min	60 p/min	50 p/min



>> Accessible structure with space saving. User-friendly automatic packaging machine.

>> Position of the Center sealing & inverting head adjustable by the touch screen with motors. Product's height up: 400 mm. Simple. Reduce operator's procedures.

>> Flexibility: No limit in length thanks to side sealing system. Product's width up to 400/500/600/700/1100 mm. All kind of films.

>> Saving :Side sealing machine 3 belts = 10 cm of film saving. Less waste. More saving.

>> Sliding door with easy access to film dispenser and wind up unit.

>> Siemens touch screen with 30 different programs. Easy set up.